


1033 Extra Large head Al-ST rivet, blind rivet, pop rivet (AFL, ASG)

Rivet body: Aluminum (AlMg3,5)
Mandrel: Steel, RoHS surface treatment

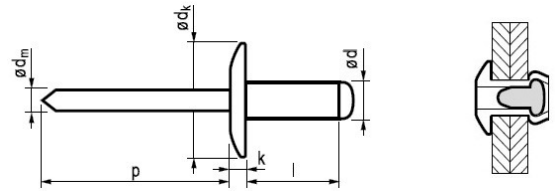

Ød * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	Ødk mm	k mm	Ødm mm	p mm	Tensile Newton	Shear Newton	Description
4,8 [+0,08/-0,15] Ø 4,9	10,0	4,5-6,0	1033-4810	16,0 [+0/-0,5]	≤2,5	~2,70	≥27	2 230	1 690	4,8*10 Extra Large head Al/St (ASG) blind rivet
	12,0	6,0-8,0	1033-4812							4,8*12 Extra head Aluminum/Steel rivet
	14,0	8,0-10,0	1033-4814							4,8*14 Extra Large head Al/St (ASG) rivet
	16,0	10,0-12,0	1033-4816							4,8*16 Extra Large head Al/St (ASG) pop rivet
	18,0	12,0-14,0	1033-4818							4,8*18 Extra Large head Al/St (ASG) blind rivet
	20,0	14,0-16,0	1033-4820							4,8*20 Extra head Aluminum/Steel rivet
	22,0	16,0-18,0	1033-4822							4,8*22 Extra Large head Al/St (ASG) rivet
	24,0	18,0-20,0	1033-4824							4,8*24 Extra Large head Al/St (ASG) pop rivet
	26,0	20,0-22,0	1033-4826							4,8*26 Extra Large head Al/St (ASG) blind rivet

Technical specifications:

- after riveting the stem/mandrel of rivet is not fixed in the rivet body necessarily
- thanks to the large head it is suitable for riveting soft materials